



# Queensbay





# Queensbay



178



22



80



85





70



90




72



92



93

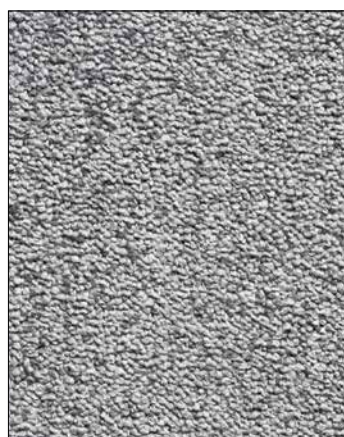

77



75



150



## SPECIFICATION

|                            |                           |            |
|----------------------------|---------------------------|------------|
| <b>Tuft Gauge</b>          | 1/10 Cut pile             | ISO 2424   |
| <b>Pile composition</b>    | 100% PA SDN (Stain proof) | ISO 2424   |
| <b>Primary Backing</b>     | Woven                     | ISO 2424   |
| <b>Secondary backing</b>   | AB                        | ISO 2424   |
| <b>Width</b>               | 400 cm ± 1%               | EN 984     |
| <b>Pile Weight</b>         | 1,580 gr / m2             | ISO 8543   |
| <b>Total weight</b>        | 2,325 gr / m2 ± 15%       | ISO 8543   |
| <b>Pile height</b>         | 10 mm                     | ISO 1766   |
| <b>Total Height</b>        | 12 mm                     | ISO 1765   |
| <b>Number of Knots</b>     | 236,400 / m2 -7.5% +10%   | ISO 1763   |
| <b>Fire Classification</b> | Cfl-S1                    | EN 13501-1 |
| <b>Use Area</b>            | Commercial use (32)       | EN 1307    |
| <b>Light fastness</b>      | ≥ 5                       | 105-B02    |
| <b>Wearability</b>         | ≥ 4                       | 105-X12    |
| <b>Water fastness</b>      | ≥ 4                       | 105-E01    |

