


# ColourTuft UAE Stock Collection



4M BROADLOOM 100% SDN DESIGN CARPET



ColourTuft

# POLY STAR Col. 2075

Solution Dyed Nylon 4 Colours | Cut Pile

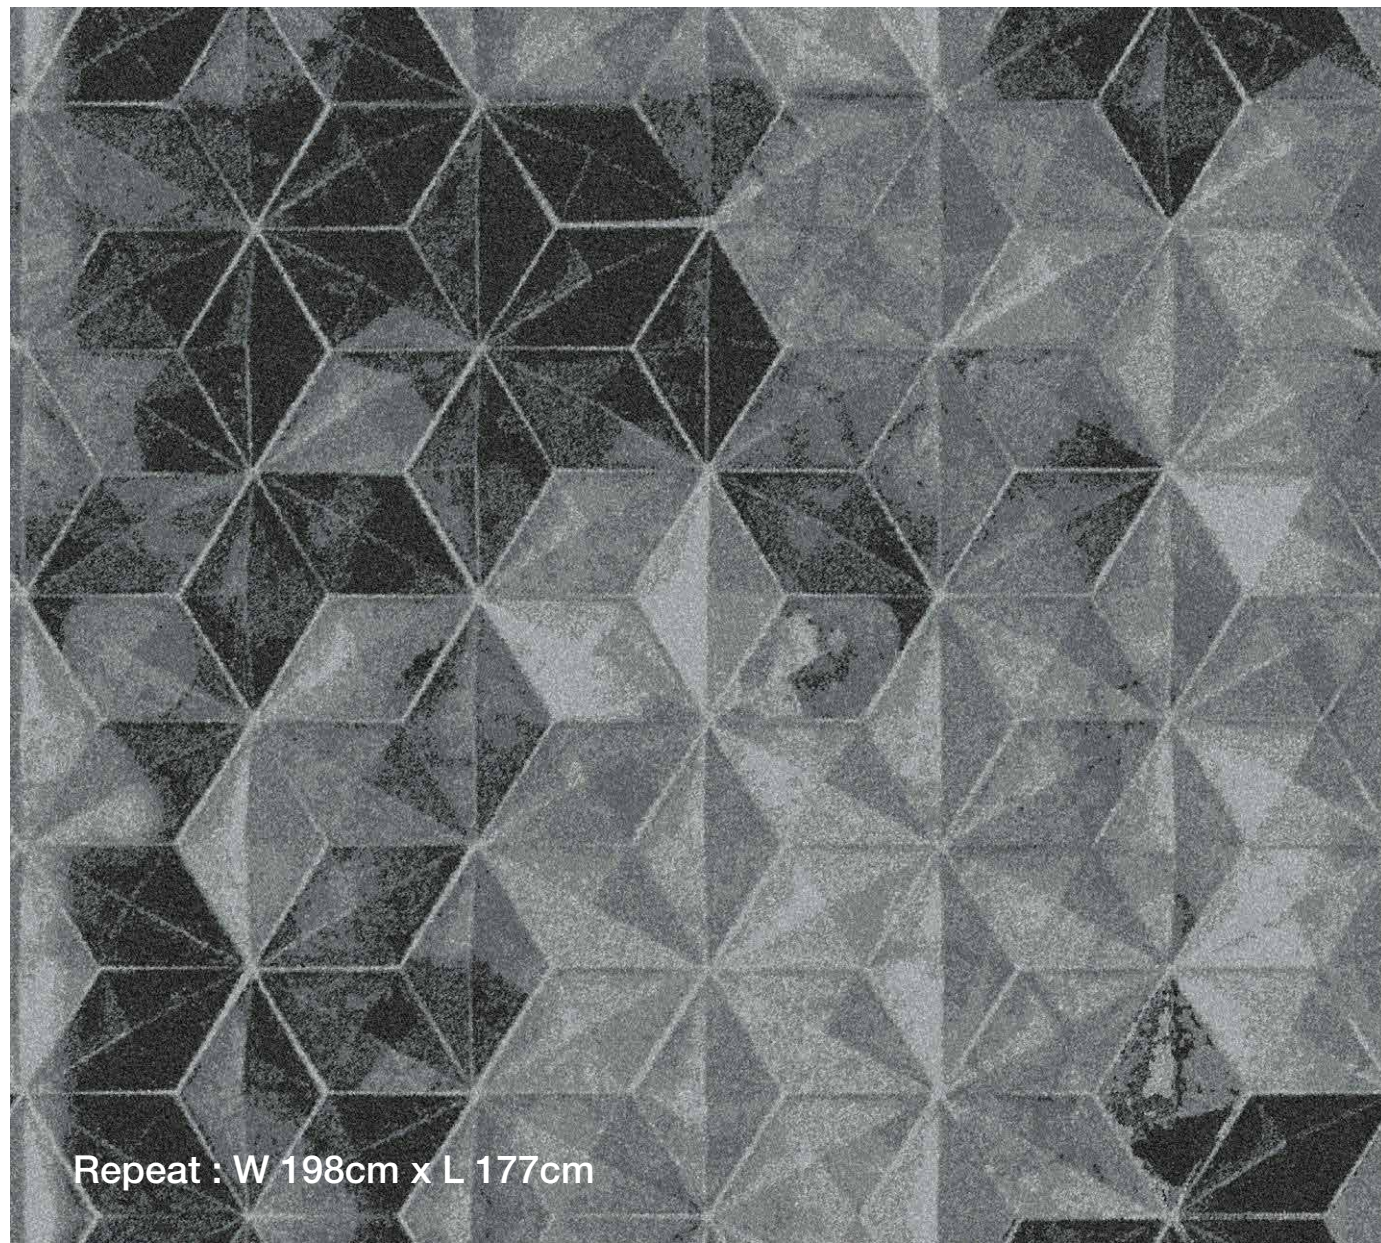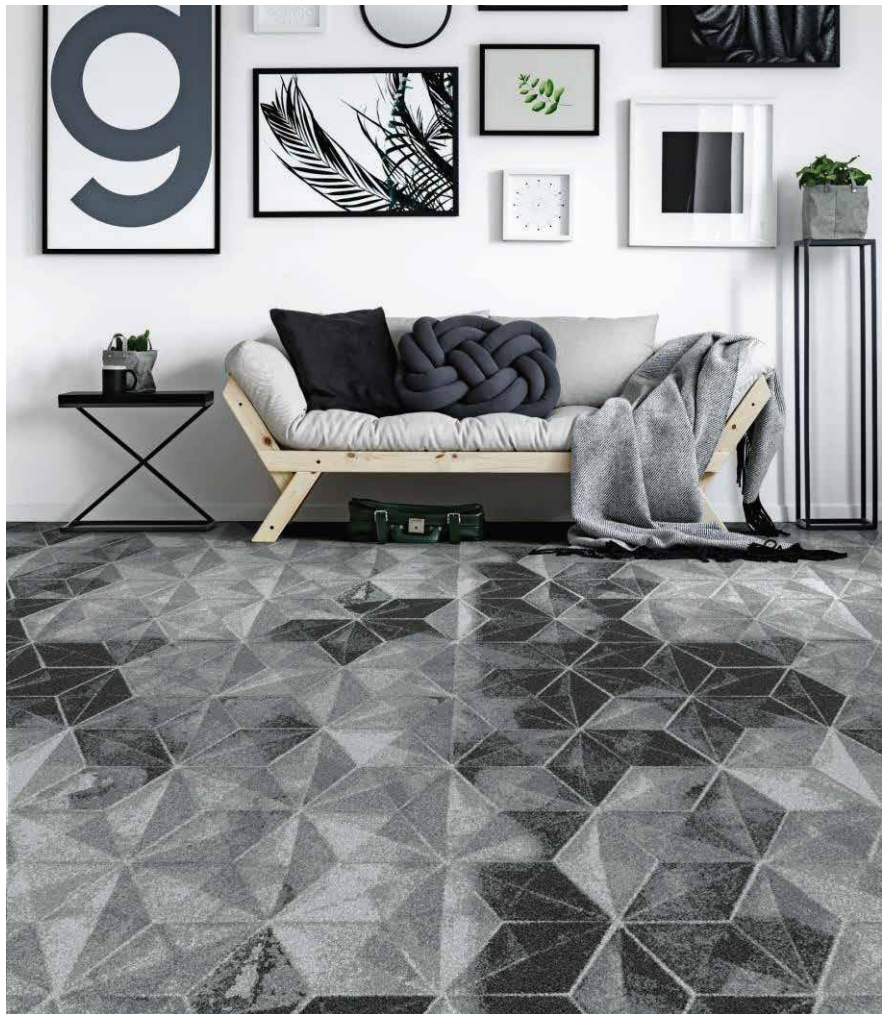


Repeat : W 198cm x L 177cm

ColourTuft

# POLY STAR Col. 2075

Solution Dyed Nylon 4 Colours | Cut Pile

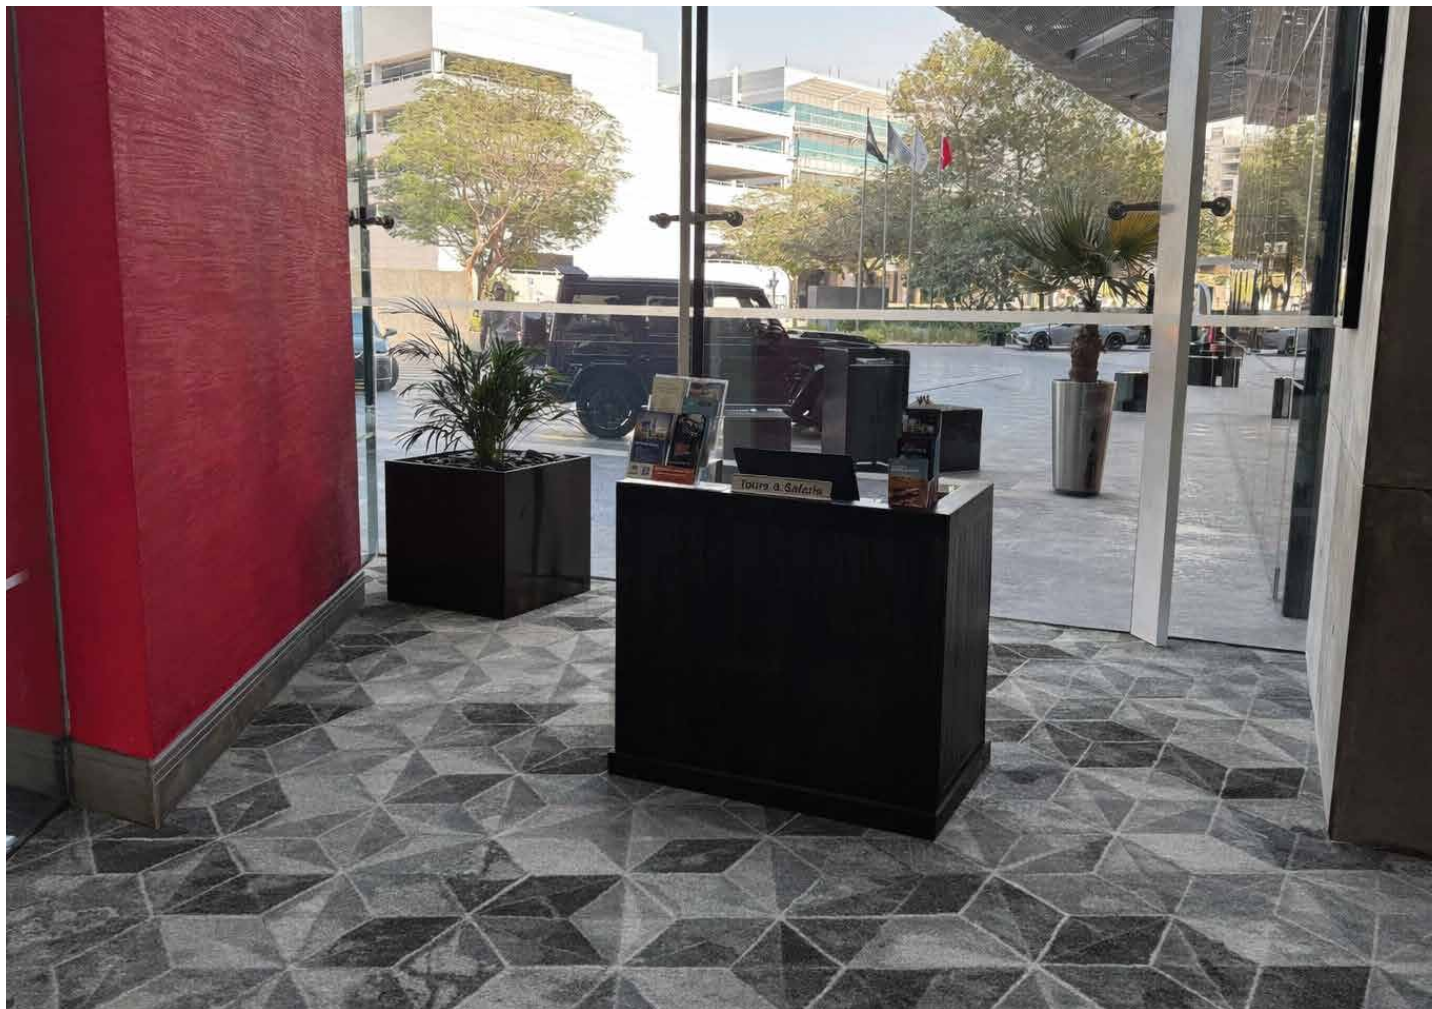


ColourTuft  
POLY STAR  
Col. 1675

ColourTuft

# JANEIRO Col. 2095

Solution Dyed Nylon 4 Colours | Cut Pile

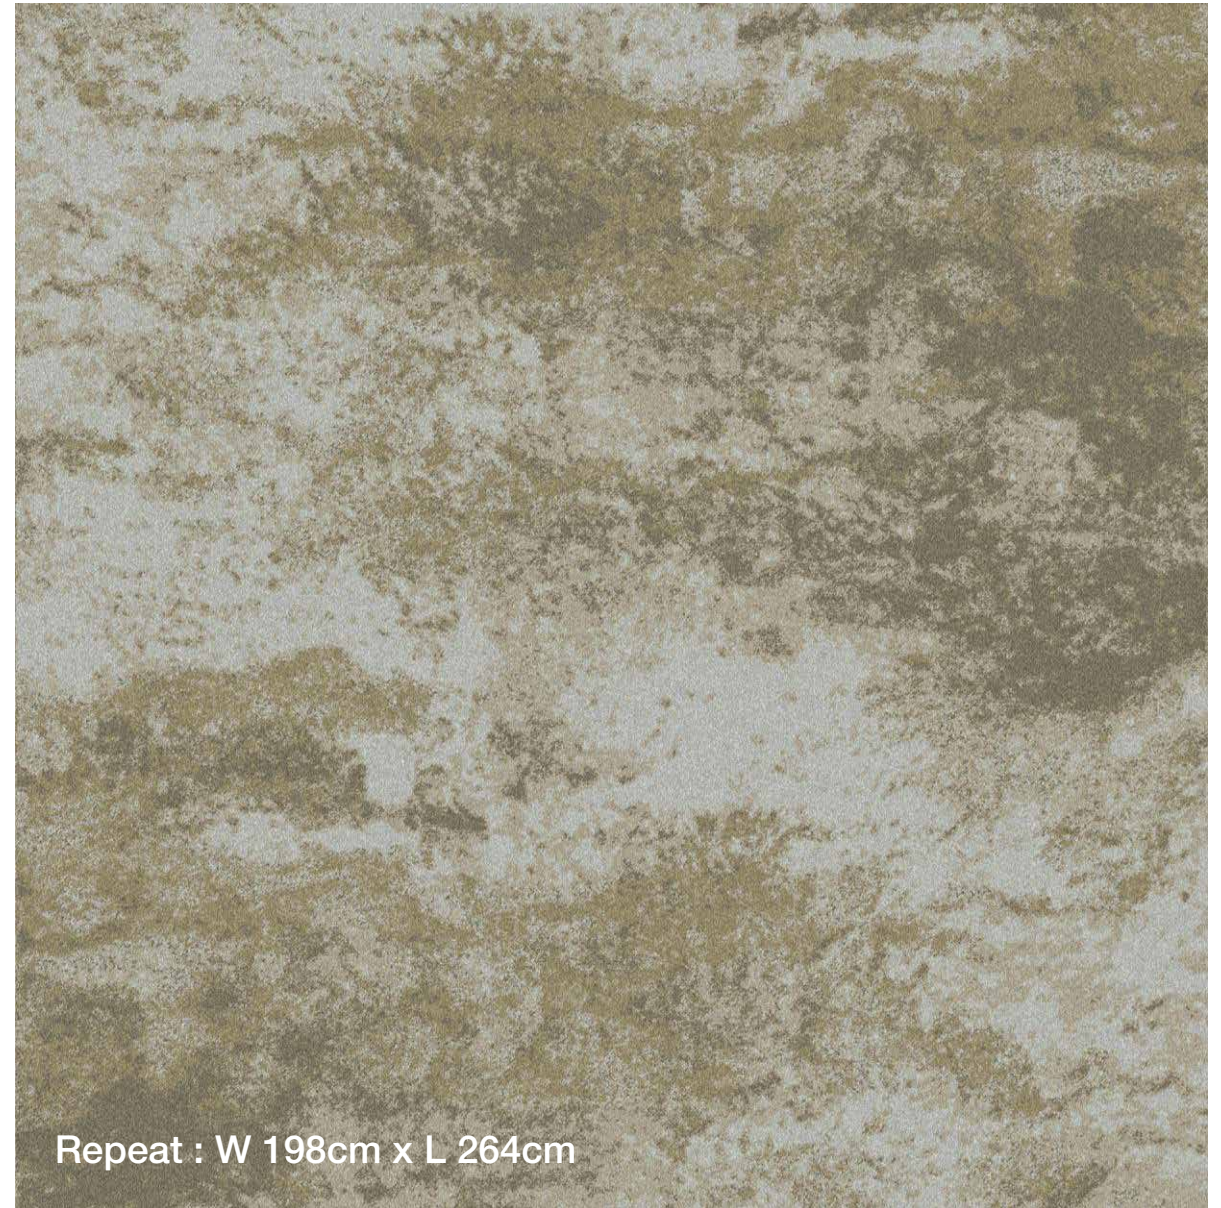


Repeat : W 198cm x L 264cm

ColourTuft

# JANEIRO Col. 2034

Solution Dyed Nylon 4 Colours | Cut Pile

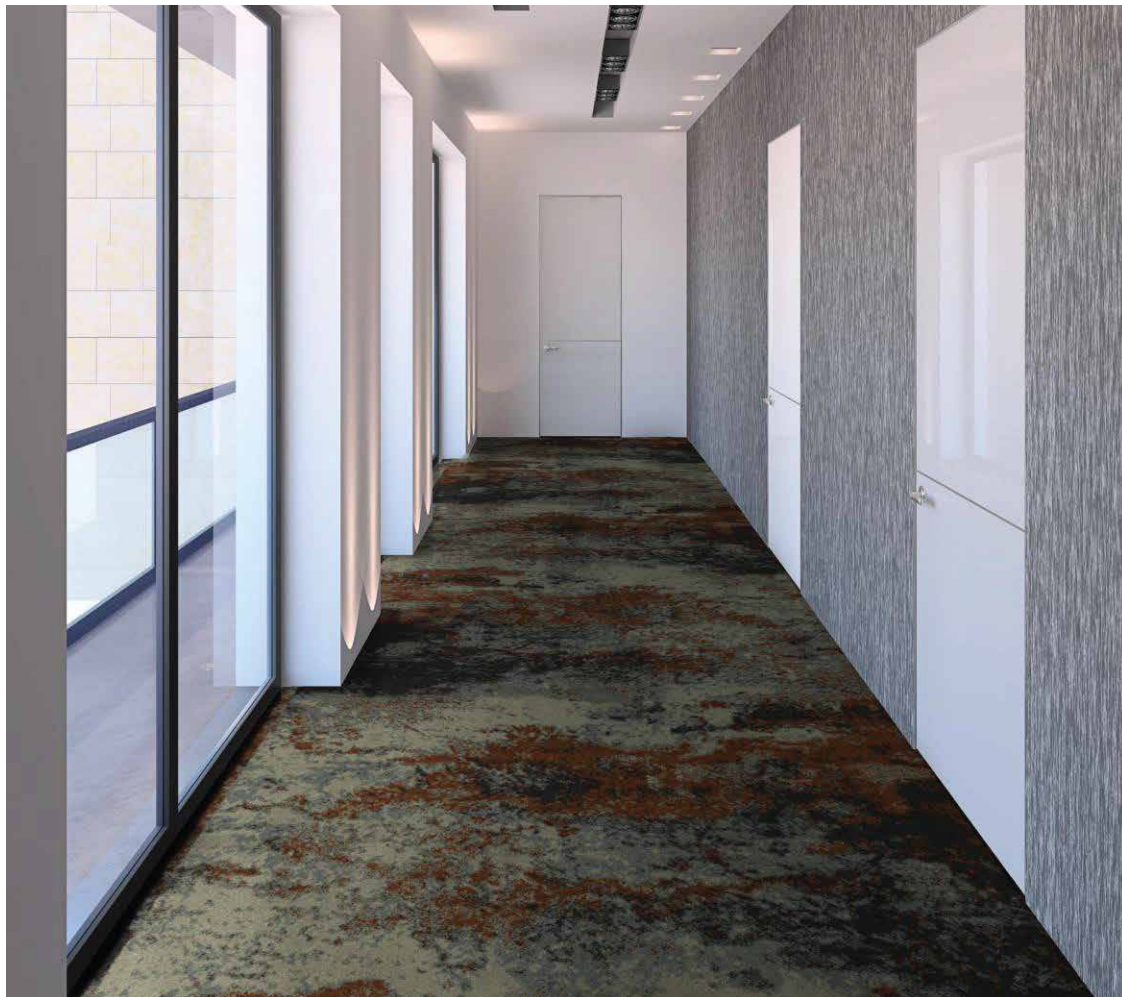

Repeat : W 198cm x L 264cm

ColourTuft

# JANEIRO Col. 2034

Solution Dyed Nylon 4 Colours | Cut Pile




ColourTuft  
JANEIRO  
Col. 1634

ColourTuft

# MOON WALK Col. 2053

Solution Dyed Nylon 4 Colours | Cut Pile

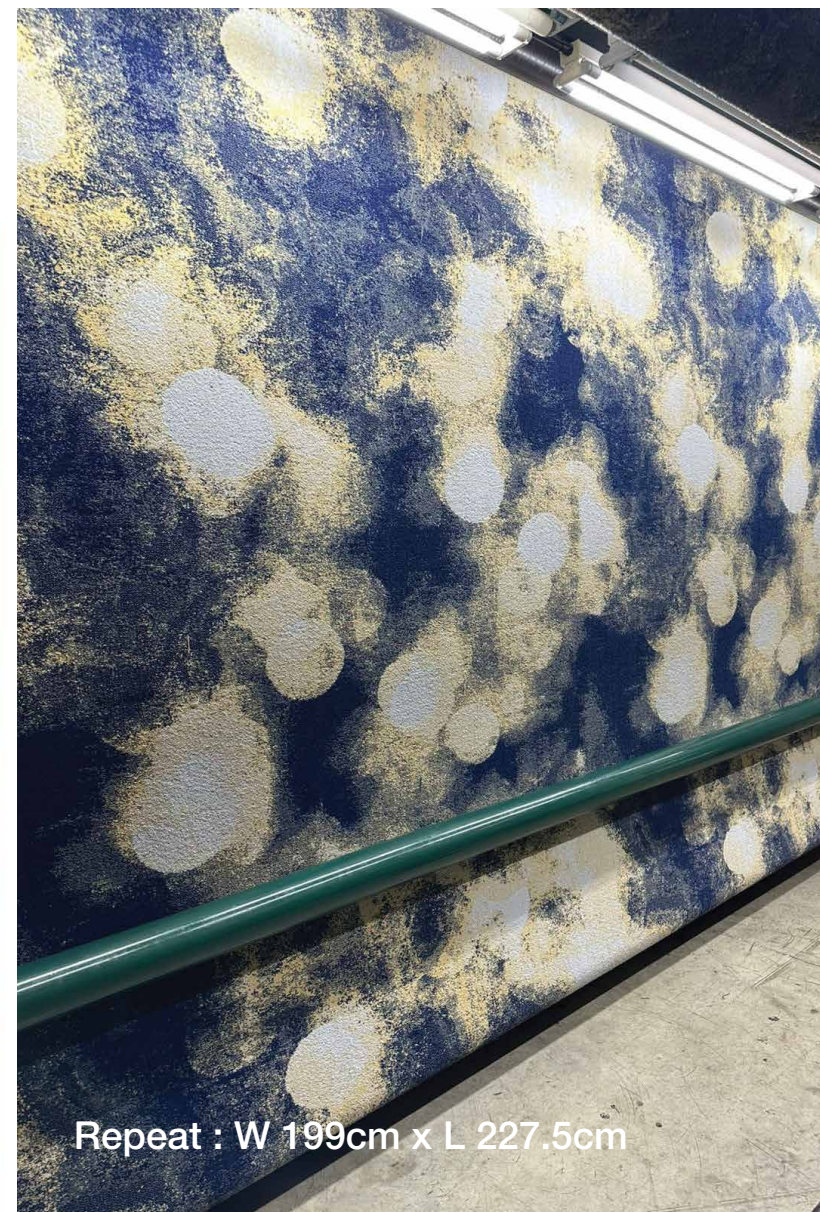


Repeat : W 199cm x L 227.5cm

ColourTuft

# LIGHT RAY Col. 2032

Solution Dyed Nylon 3 Colours | Cut Pile

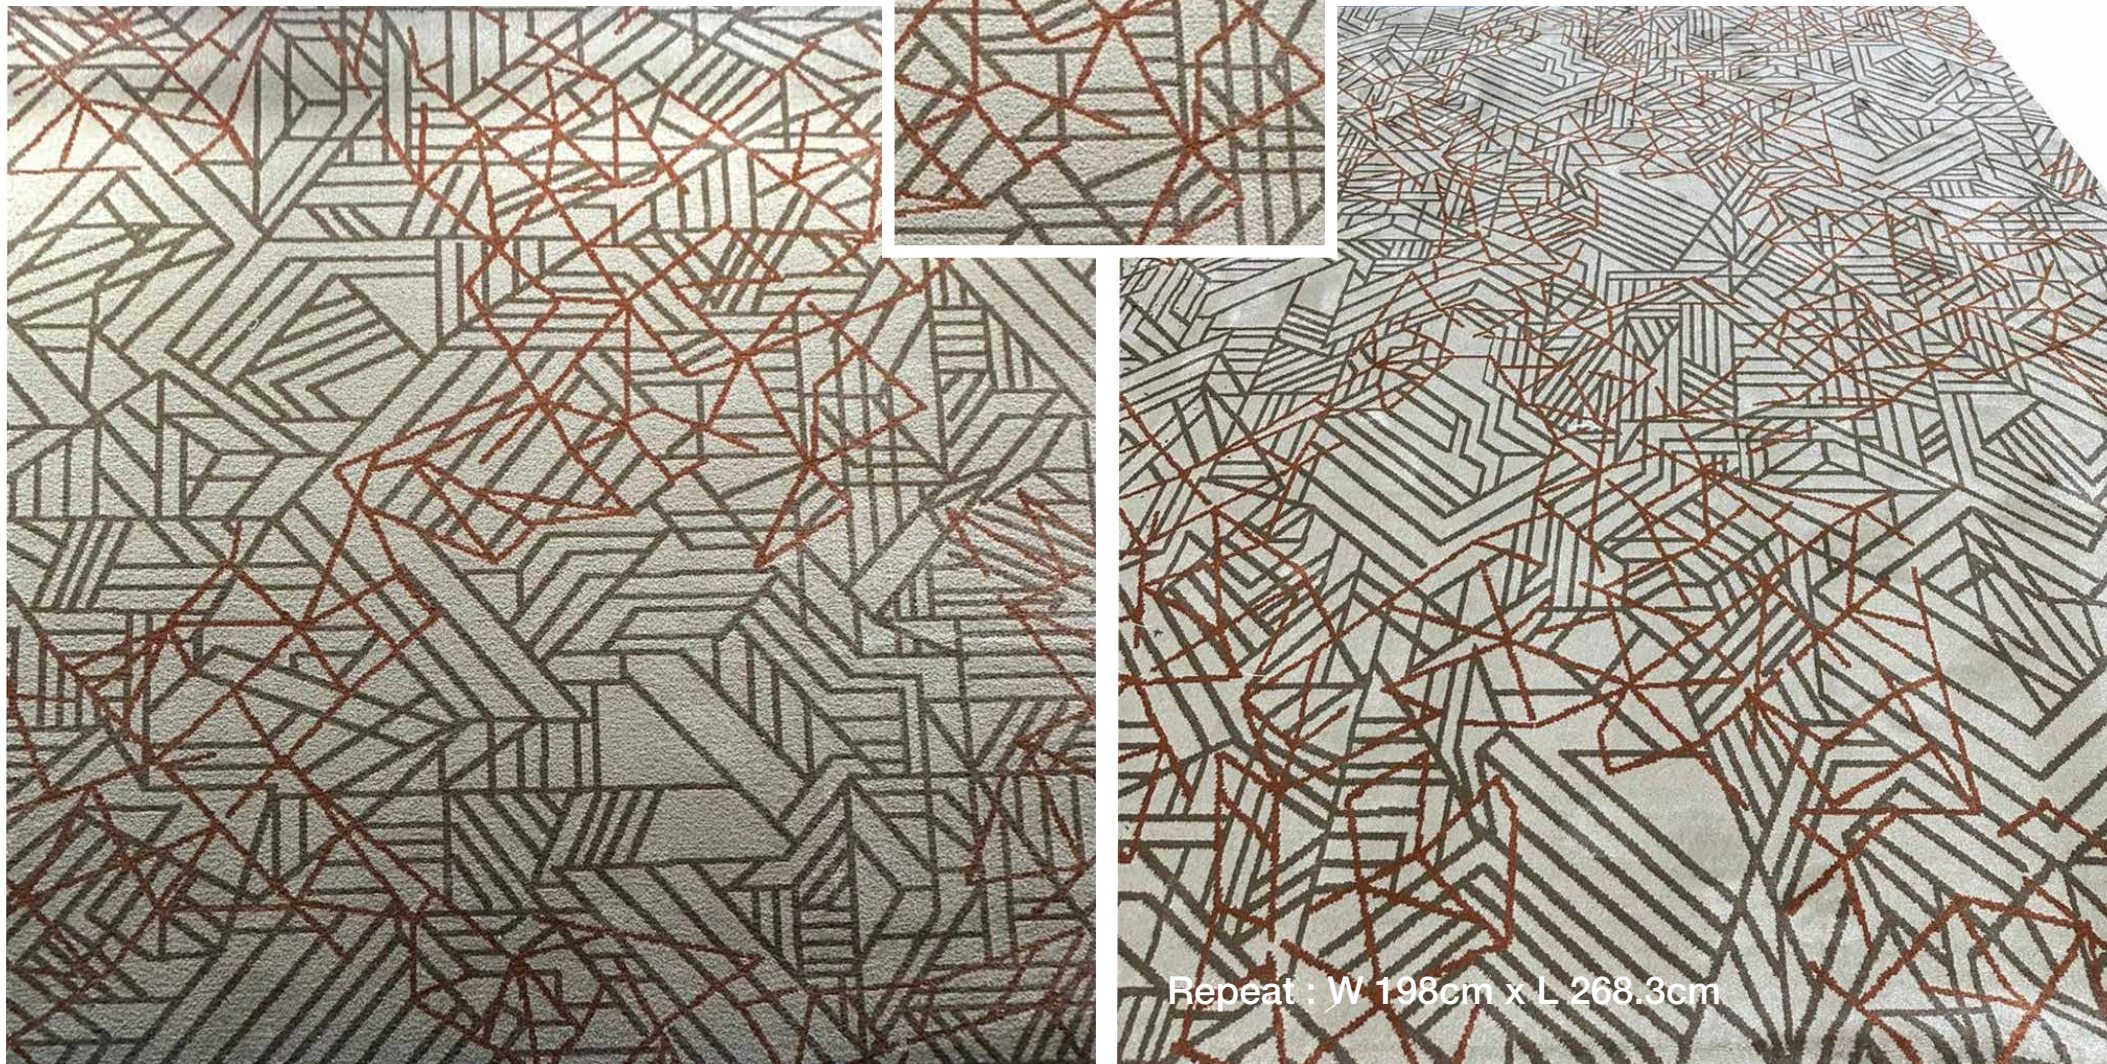

Repeat : W 198cm x L 268.3cm

ColourTuft

# GOLEM Col. 2073

Solution Dyed Nylon 4 Colours



ColourTuft

# INDIGO

Solution Dyed Nylon 4 Colours



Repeat : W 200 cm x L 200 cm

## PRODUCT DATA SHEET

# NYLON GENERIC



CONSTRUCTION	ColourTuft
PILE FIBER COMPOSITION	100% Nylon
YARN TYPE	Heat Set
DYE METHOD	Solution Dyed
PILE WEIGHT	2000 G/m <sup>2</sup>
TUFTING GAUGE	1/10"
PRIMARY BACKING	Woven
SECONDARY BACKING	Action Fleece Backing
CARPET WIDTH	4.0 mtr
PILE HEIGHT	8.0 MM
TOTAL HEIGHT	11.0 MM
PROTECTIVE TREATMENT	UV Treated Yarn

## PERFORMANCE SPECIFICATION

VOC Emission	ASTM D5116-17	<0.5 mg/m <sup>2</sup> /hour (CRI GLP)
Flammability	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
Critical Radiant Flux	ASTM E648-08	Class I
Color Fastness	ISO 105 B02:2014	4/5 on Grey Scale
Impact Sound Insulation	ASTM E989-06	ΔLw 32dB

**\* Suitable for hotel public areas**



- Due to Carpet Manufacturing Process, mass specification are Subject to ± 5% variation
- Shading or Pile reversal is nature of cut pile carpet and it is not manufacturing defect
- Color may slightly vary from one dye lot to another dye lot
- We reserve to amend the above specification without prior notice due variables in raw material supplies

